


# PDF Technical File

Visitors to this web site are authorized to download this information for reprints or electronic transfer to their technical reference files.




## engineering kit #EK28B0021

SOLID FERRITES FOR APPLICATIONS UP TO 1 GHz WITH PEAK PROPERTIES AT 250MHz.

Sample assortment of twenty cylindrical and flat solid ferrite suppressors in universal #28 wideband material formulation for applications up to 1 GHz. Contains many of the cylindrical and flat rectangular designs from our Universal Wideband products, including the "SM" shock mount versions.

All catalog items are in stock at all times for immediate delivery.

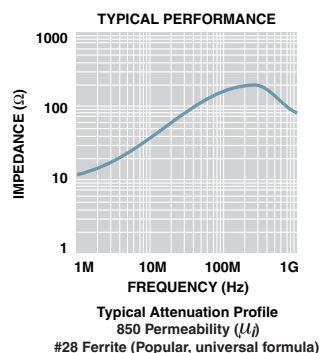

### Typical Performance:

Attenuation of unwanted high frequencies from 30MHz to 1GHz with peak absorption at 200-250MHz.

### Contains Part Numbers:

28B1387, 28B1250, 28B1102, 28B1020-1, 28B0736, 28B0686-2, 28B1225-0, 28B0999, 28B0562-2, 28B0375-3, 28B0300-0, 28B0250-1, 28B0137-3, 28B0385-2, 28B0138-7, SM28R1531, SM28B1779, SM28B3149, SM28R0760, SM28R1127

For further technical information, please contact us at:

**FerriShield<sup>®</sup>**, INC.  
Interference Control Components

Mulberry Professional Plaza • 426 Mulberry Street \* Suite 300 • Scranton, PA 18503  
Tel: 570.961.5617 • Fax: 570.969.6274 • e-mail: info@ferrishield.com

[www.ferrishield.com](http://www.ferrishield.com)

ISO 9001:2000 registered